

WATER DISPENSERS OF COLD, HOT AND NATURAL WATER. THREE TEMPERATURES, FOR THREE TAPS.





Dispensers of water with a **modern design** and current, ideal for your home and company.



Equipped with a set of **three times** to power get cold water, hot and natural.




They incorporate a information system multifunction through a sign of LED lighting.

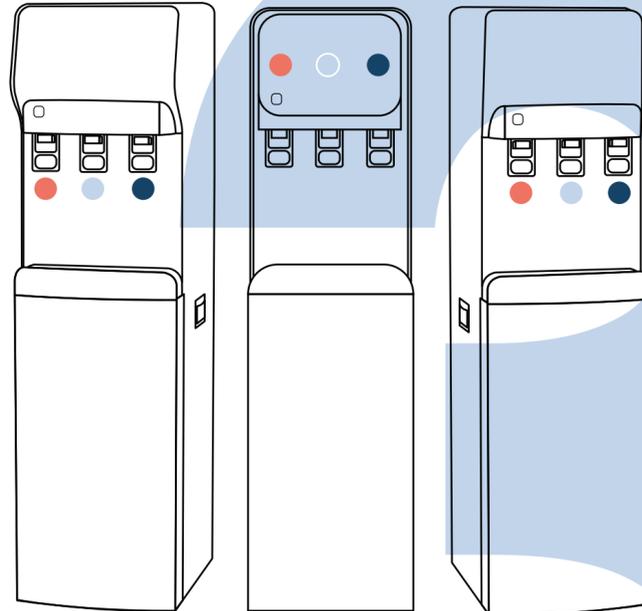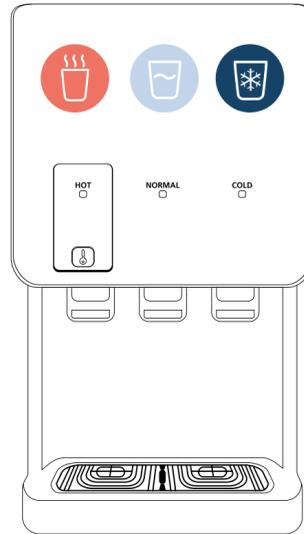

WITH **SYSTEM ULTIMATE FILTRATION** GENERATION AND EASY MAINTENANCE.

columbia aqua

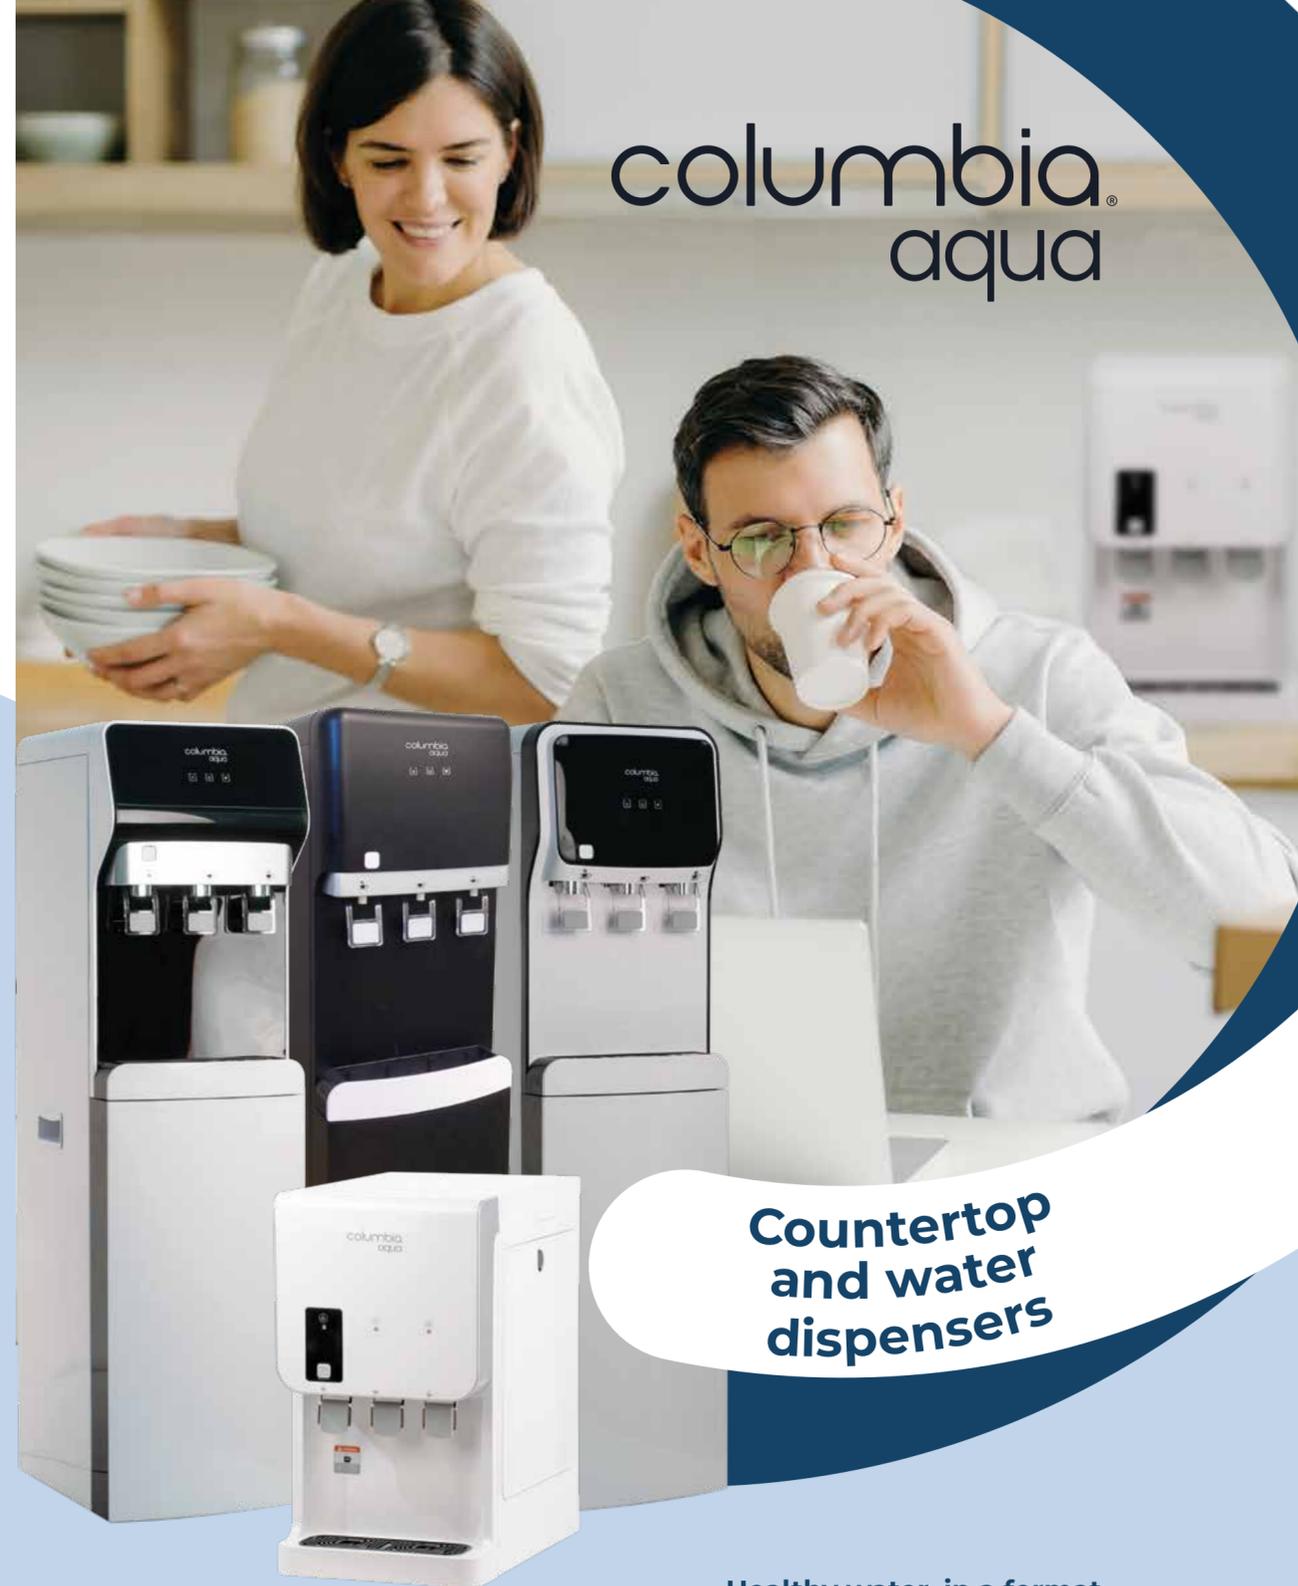

Countertop and water dispensers



CERTIFIED
UNE 149101
EQUIPMENT

Countertop and water dispensers



MEMBER
Water Quality Association



ACREDITED BY ENAC
Certif. nº 346200/14/0712




WLG (B-60326279) is an Aqua España member, who belongs to Aqua Europa (Federation of European nation associations).



WLG (B-60326279), has the rights granted for Authorized Economic Operator with number ESAE0F18000008U6 and 13/02/2018 as a date of entry of the authorization.


Healthy water, in a format modern and cheap.

ERGONOMIC DESIGN AND MODERN

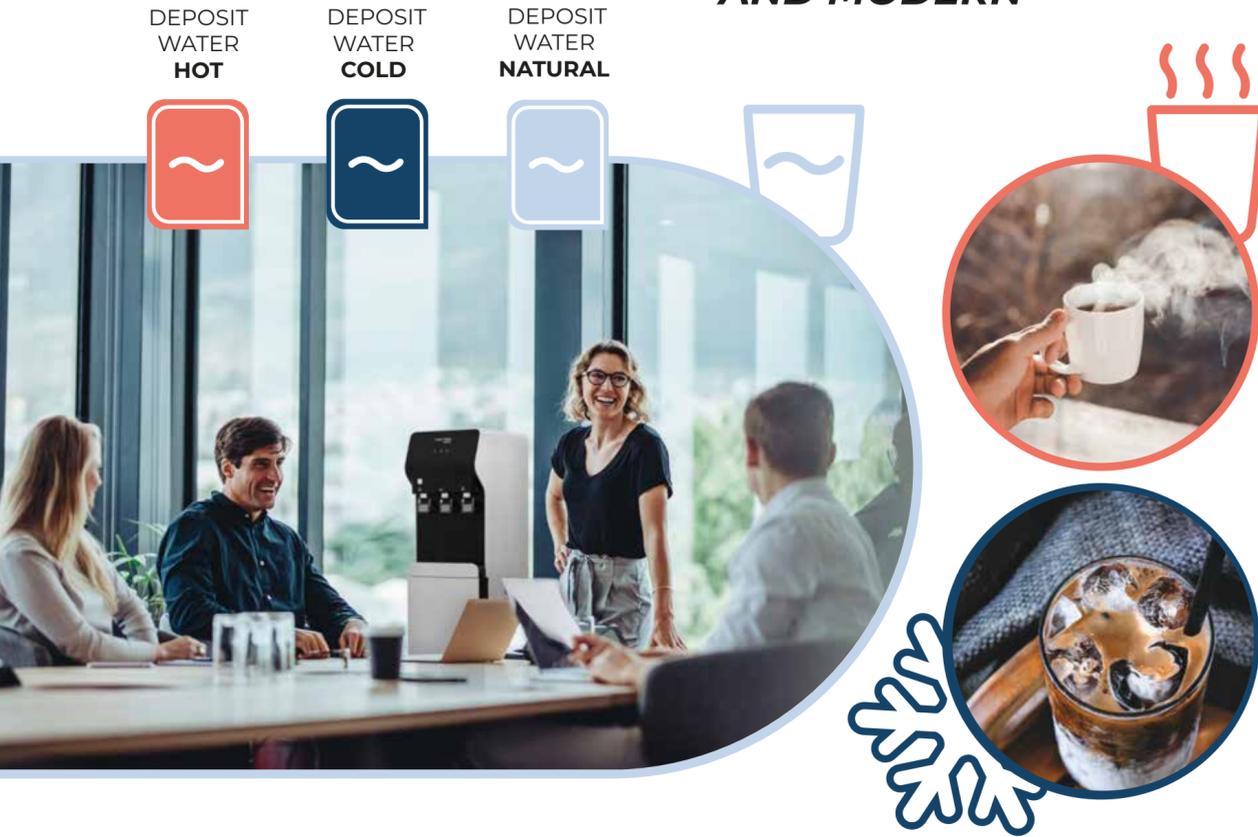

HIGH PERFORMANCE AND GREATER WELL-BEING

- UV LED** ● Eliminates germs and microorganisms
- Sediment Filter** ● Reduces impurities and sand
- Carbon Block Filter** ● Improves the taste and eliminates the bad smell
- RO Membrane** ● Eliminates microorganisms contaminants
- Post Carbon Filter** ● Absorbs harmful organic compounds

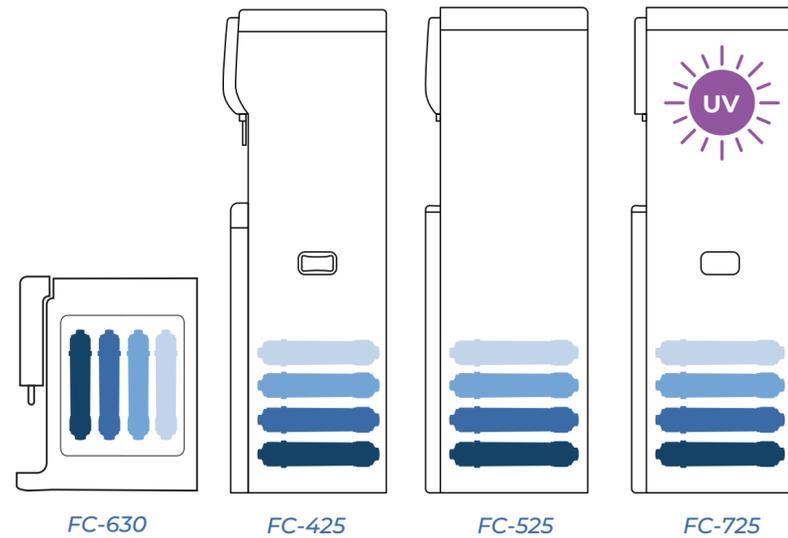

columbia aqua

- Healthy,** high-quality water.
- Easy-to-use** system Say goodbye to bottles.
- Much cheaper** save on plastic.
- Ecological** and reduces environmental impact.



Ideal water dispensers for homes and businesses.



	FC-425	FC-525	FC-630 S	FC-725
COLD, NATURAL AND HOT WATER	●	●	●	●
RO SYSTEM	●	●	●	●
ULTRAFILTRATION SYSTEMS	●	●	●	●
WEIGHT	25 Kg	25 Kg	15 Kg	18 Kg
POWER SUPPLY	220 - 240 V AC 50Hz			
COLD WATER TANK CAPACITY	4 Litros	4 Litros	3,5 Litros	5 Litros
COOLING SYSTEM 5 l/h	●	●	●	●
COMPRESSOR POWER	85W	85W	90W	85W
REFRIGERANT GAS	R600a	R134a	R600a	R600a
HOT WATER TANK CAPACITY	1 litro	1 litro	1,5 litro	1 litro
HEATING CAPACITY	4 l/h	4 l/h	5 l/h	4 l/h
HEATING SYSTEM	Electric resistance in tank			
HEATING POWER	400W	400W	420W	500W
COLD WATER TEMPERATURE	>38°C - 4°C	>38°C - 4°C	>90°C - 5°C	>40°C - 2°C

